


> F362 SERIES

精密小徑回轉頂針

MEDIUM DUTY PRECISE SMALL DIAMETER LIVE CENTER

- ◎ 適用: CNC車床、高速車床及其他機床。
Application CNC lathe, high speed lathe and other lathe
- ◎ 用途: 適用小徑軸心長度300mm以內中車削加工。
Working Usage Applicable for small diameter and length less than 300mm medium turning process
- ◎ 結構: 採用止推軸承、前後滾針軸承，兩個支撐點特殊設計製成。
Structure Adopted thrust bearing and needle bearing at front and rear place, with the design of two supporting point
- ◎ 精準度: 0.002以內
TIR Less than 0.002mm

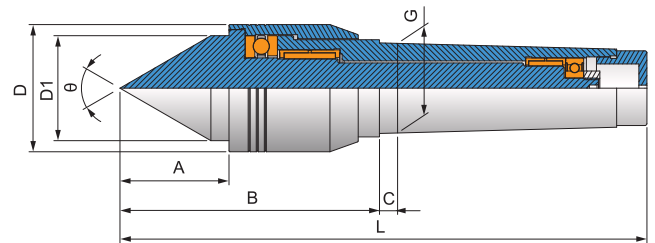

規格 / Specification 單位/UNIT: mm


型式/外表尺寸 Model/Spec	A	B	C	D	D1	G	L	θ	軸承最高轉數 Max. RPM	軸承徑向力 (載重) Max. radial load	軸承軸向力 (推力) Max. axial thrust force
F362-2	28	75	6	32	23	17.780(MT2)	144	60°	4,000 rpm	400 kg	1,000 kg
F362-3	36	91	8	41	35	23.825(MT3)	178	60°	3,500 rpm	1,200 kg	1,500 kg
F362-4	41	100	9	48	40	31.267(MT4)	208	60°	3,500 rpm	1,400 kg	1,900 kg
F362-5	54	134	9	63	52	44.399(MT5)	269	60°	3,000 rpm	2,200 kg	2,500 kg

> F363 SERIES

精密小徑細長型回轉頂針

MEDIUM DUTY PRECISE SMALL DIAMETER LONG NOSE LIVE CENTER

- ◎ 適用: CNC車床、高速車床及其他機床。
Application CNC lathe, high speed lathe and other lathe
- ◎ 用途: 適用小徑軸心長度300mm以內中車削加工(細長型車削加工)。
Working Usage Applicable for the slender workpiece and length less than 300mm ordinary turning process
- ◎ 結構: 採用止推軸承、前後滾針軸承，兩個支撐點特殊設計製成。
Structure Adopted thrust bearing and needle bearing at front and rear place, with the design of two supporting point
- ◎ 精準度: 0.002以內
TIR Less than 0.002mm

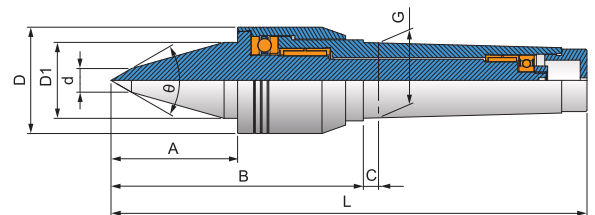

規格 / Specification 單位/UNIT: mm

型式/外表尺寸 Model/Spec	A	B	C	D	D1	d	G	L	θ	軸承最高轉數 Max. RPM	軸承徑向力 (載重) Max. radial load	軸承軸向力 (推力) Max. axial thrust force
F363-2	40	87	6	32	20	8	17.780(MT2)	156	60°	4,000 rpm	400 kg	1,000 kg
F363-3	46	101	8	41	25	10	23.825(MT3)	188	60°	3,500 rpm	1,200 kg	1,500 kg
F363-4	55	114	9	48	32	12	31.267(MT4)	222	60°	3,500 rpm	1,400 kg	1,900 kg
F363-5	75	155	9	63	45	14	44.399(MT5)	290	60°	3,000 rpm	2,200 kg	2,500 kg