




OMSR-D型

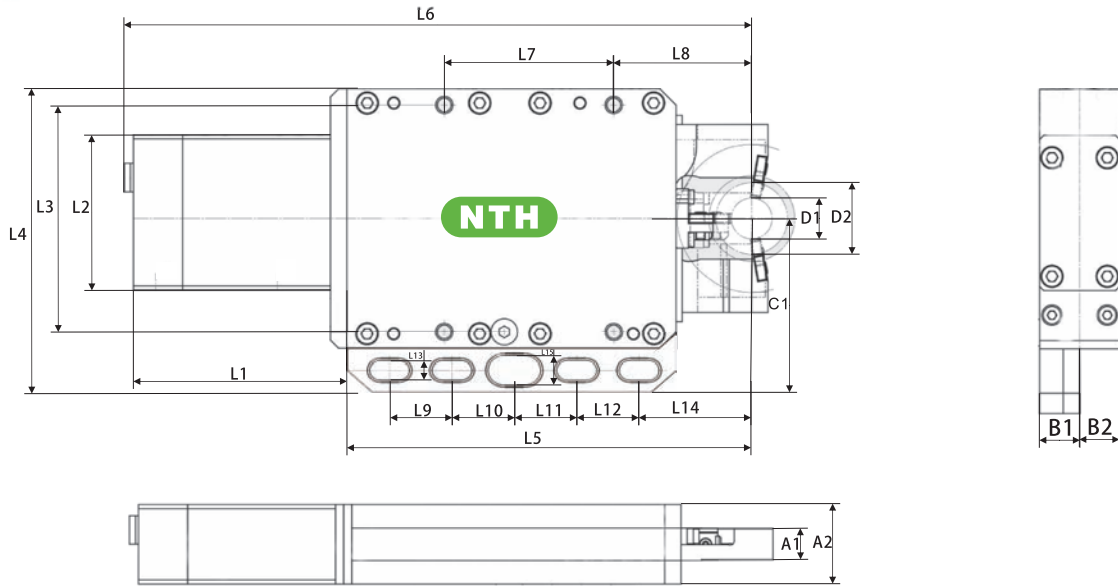

可非標訂做

Non-standard requirements can be made

NTH-OMSR 型號/Model 規格/Spec	OMSR-D 1	OMSR-D 2	OMSR-D 3	OMSR-D 4	OMSR-D 5	OMSR-D 6	OMSR-D 7
D1 (mm)	3	12	28	44	60	74	87
D2 (mm)	18	28	44	60	74	87	100
L1 (mm)	83.5		124.1			145.1	
L2 (mm)	70		77			91	
L3 (mm)	/		120.6			190.5	
L4 (mm)	120		166.2			216	
L5 (mm)	162		222.5			408	
L6 (mm)	249.5		351.1			557.6	
L7 (mm)	/		94.7			/	
L8 (mm)	/		88.4			/	
L9 (mm)	25		31.7			/	
L10 (mm)	25		27.4			/	
L11 (mm)	25		27.3			/	
L12 (mm)	25		31.8			/	
L13 (mm)	9×4		13.46*5			/	
L14 (mm)	45		79			/	
L15 (mm)	13.46×1		/			/	
A1 (mm)	10		19			18.2	
A2 (mm)	30		45			55	
B1 (mm)	15		19			/	
B2 (mm)	/		/			/	
C1 (mm)	70		92.5			108	
最大工作壓力 Work pressure Max. (bar)	50		45			35	
工作壓力 Work pressure (bar)	20-50		15-30			10-30	
重復定位精度 Repeatability accuracy (mm)	± 0.001		± 0.001			± 0.001	
重量 Weight (KG)	4.3		11.2			30	

• 非标准油缸按要求订货，保留技术更改！ Cylinders differing from standard available on request, Subject to technical changes.

