

固定式系列

Dead centers series

輕負荷


Light duty

> TSC-9662 SERIES

附螺帽固定式頂針

LIGHT DUTY WITH NUT DEAD CENTER

- ◎ 適用: CNC車床及其他機床。
Application CNC lathe and other lathe
- ◎ 用途: 適用尾座回轉型結構設計使用。
Working Usage Applicable for rotary structure of tailstock
- ◎ 結構: 採用合金鋼材, 經熱處理硬度達57°~60°, 精密研磨製成。
Structure Made of alloy steel and hardened to HRC 57-60, precision ground
- ◎ 配件: Y型扳手
Accessories Y type spanner
- ◎ 精準度: 0.002以內
TIR Less than 0.002mm

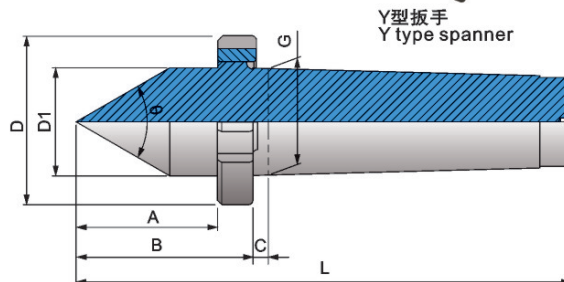

規格 / Specification 單位/UNIT: mm

型式/外表尺寸 Model/Spec	A	B	C	D	D1	G	L	θ
TSC-9662-3A	51	66	5	53	24.1	23.825(MT3)	150	60°
TSC-9662-4A	68	93	4	68	31.6	31.267(MT4)	196	60°
TSC-9662-5A	89	114	4	88	45	44.399(MT5)	244	60°
TSC-9662-6A	100	140	--	108	65	63.348(MT6)	320	60°

鎢鋼系列

Tungsten carbide series

固定式


Dead centers type

> TSC-9662鎢鋼 SERIES

附螺帽鎢鋼固定式頂針

TUNGSTEN CARBIDE STEEL POINT WITH NUT DEAD CENTER

- ◎ 適用: CNC車床及其他機床。
Application CNC lathe and other lathe
- ◎ 用途: 適用尾座回轉型結構設計使用。
Working Usage Applicable for rotary structure of tailstock
- ◎ 結構: 採用合金鋼材, 經熱處理硬度達57°~60°, 精密研磨製成。
Structure Made of alloy steel and hardened to HRC 57-60, precision ground, adopted the tungsten carbide steel from the USA, which is high wear resistance
- ◎ 特點: 採用美國進口鎢鋼原料製成, 不易磨損。
Advantage Adopted the tungsten material imported from the US, which is wear resisting
- ◎ 配件: Y型扳手
Accessories Y type spanner
- ◎ 精準度: 0.002以內
TIR Less than 0.002mm

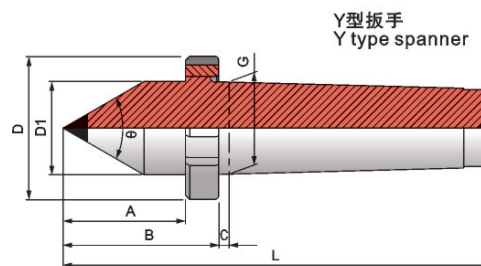

規格 / Specification 單位/UNIT: mm

型式/外表尺寸 Model/Spec	A	B	C	D	D1	G	L	θ
TSC-9662-TS-3A	36	51	8	53	24.1	23.825(MT3)	138	60°
TSC-9662-TS-4A	42	62	9	68	31.6	31.267(MT4)	170	60°
TSC-9662-TS-5A	59	71	9	88	45	44.399(MT5)	206	60°