

> BTS SERIES



二爪三爪共用中空卡盤

2 JAW AND 3 JAW COMPATIBLE POWER CHUCK



- ◎ 同一個卡盤，可實現兩爪卡盤及三爪卡盤的功能。
- ◎ 在夾持圓形工件切換為异形工件時，祇須調整卡爪，無需更換卡盤。
- ◎ 卡盤所有滑動面均經過表面硬化及研磨處理，以提高回轉精度與使用壽命。
- ◎ The function of 2 jaw chuck and 3 jaw chuck can be used in one same chuck.
- ◎ When the round workpiece need change to irregular type, just change the chuck jaws, no need to change the chuck.
- ◎ All chuck's sliding surfaces are hardened and ground to increase rotary accuracy and longer service life.



BTS-08A6

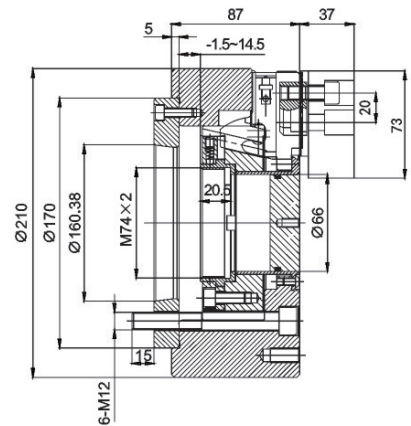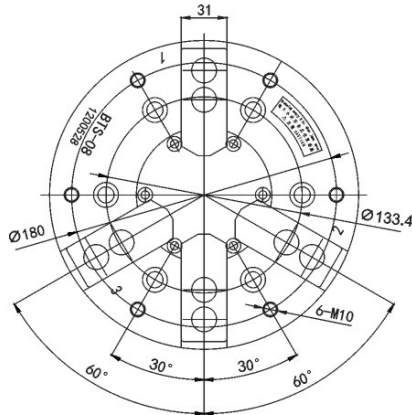

BTS-10A8

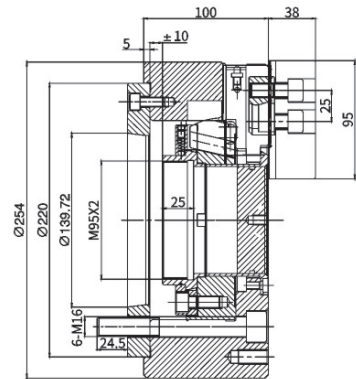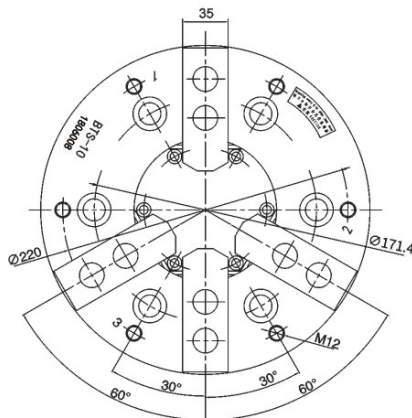

規格 Spec 型號 Model	通孔直徑 Through hole dia. (mm)	楔心行程 Plunger stroke (mm)	爪行程直徑 Jaw stroke (Dia) (mm)	最大夾持直徑 Max clamping dia Kg · m ²	最小夾持直徑 Min clamping dia (mm)	容許油壓缸推力(兩爪) Max.D.B.Pull KN(Kgf)	容許油壓缸推力(三爪) Max.D.B.Pull KN(Kgf)
BTS-08A6	66	16	7.4	210	23	14.7(1470)	21.5(2200)
BTS-10A8	75	20	9.2	254	31	23.1(2360)	34.3(3500)

規格 Spec 型號 Model	最大夾持力(兩爪) Max clamping force KN(Kgf)	最大夾持力(三爪) Max clamping force KN(Kgf)	最高轉速 Max RPM	重量 Weight Kg	適合油壓缸 Matched cylinders	最大使用壓力(兩爪) Max.pressure Mpa(Kgf/cm ²)	最大使用壓力(三爪) Max.pressure Mpa(Kgf/cm ²)
BTS-08A6	37.9(3870)	56.8(5800)	4200	25	H-1552	1.2(12)	1.8(18)
BTS-10A8	57.2(5840)	85.8(8750)	3300	35	H-1875	1.4(14)	2.1(21)

* 保留技術更改的權利，恕不另行通知 Subject to technology changes without prior information
* 非標需求可訂做 Non-standard requirements can be made