


NTH[®]

圓形同動求心虎鉗 SELF-CENTERING VISES

ISO-9001:2015



高High 強度strength. **高High** 精度accuracy.

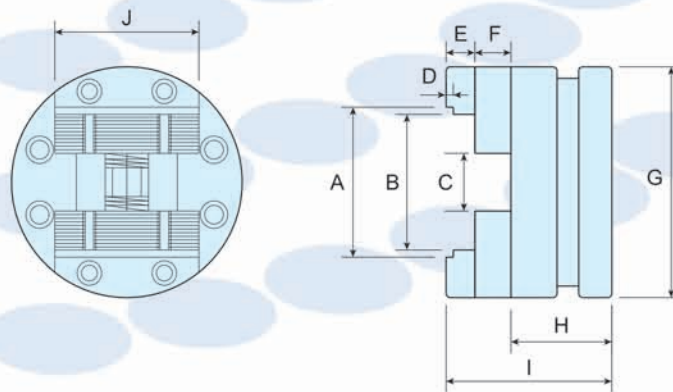


MODEL	A	B	C	D	E	F	G	H	I	J	N.W.
TMV-75	80	70	30	5	15	15	120	50	80	75	8kg
TMV-100	105	95	40	5	20	25	160	70	115	100	15kg
TMV-130	135	125	50	5	25	25	210	75	125	130	34kg
TMV-160	165	155	60	5	25	25	250	80	130	160	49kg

ISO-9001:2015

高High 強度strength. 高High 精度accuracy.

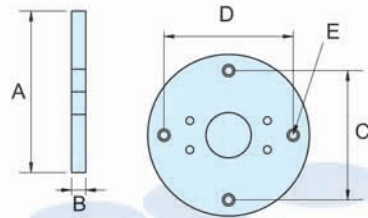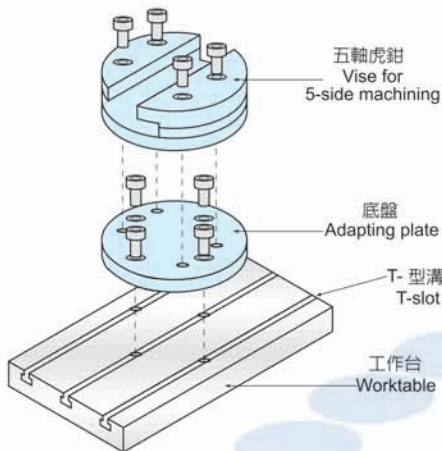

MODEL	A	B	C	D	E	N.W.
TMV-102	159	22	130	130	M10	3.5kg
TMV-132	209	22	160	160	M12	6.5kg
TMV-162	249	22	200	200	M12	9kg



特性：

- ▶ 同動式求心虎鉗適用四軸，五軸，立臥式CNC銑床之精密加工。
- ▶ 虎鉗中心重覆定位精度可保持 $\pm 0.01\text{mm}$ 。
- ▶ 虎鉗本體材質使用合金工具鋼，滑軌經高頻熱處理HRC45度以上，可保持高耐磨性。
- ▶ 虎鉗鉗口採用全鋼材質，經熱處理硬度高達HRC55度以上，可拆換方向使用，變化性與互換性極佳。
- ▶ 虎鉗特殊的結構設計，夾持工件時所產生的下壓力能有效防止工件上浮情形，鎖固力極佳。

A good solution for clamping on both turning centres and 5-axis milling machines.

- ▶ For quick&easy workpiece clamping on turning centres or for 5-axis machining on machine centres. Round-shaped style occupies less space and reduces interference.
- ▶ Available are different styles of vise jaws for different machining needs. The TMV vises come with different jaw width of 100mm, 130mm, 160mm and 200mm.